



KXCC2-PREP

| Dimensions (mm) | External | Internal |
|-----------------|----------|----------|
| Height | 877 | 455 |
| Width | 903 | 830 |
| Depth | 700 | 595 |
| Capacity (ltr) | | |
| Gross | | 240 |
| Net | | |



KXCC3-PREP

| Dimensions (mm) | External | Internal |
|-----------------|----------|----------|
| Height | 877 | |
| Width | 1368 | |
| Depth | 700 | |
| Capacity (ltr) | | |
| Gross | | 368 |
| Net | | |

Features

- 201 stainless steel exterior & interior
- Internal corners rounded to aid cleaning
- 1 x adjustable GN1/1 shelf per door
- GN sized well accepts containers - max depth 150 mm (containers are not included)
- Hinged lid over GN well
- 135mm deep polypropylene cutting board
- 35mm insulation
- Removable condenser filter for cleaning

Additional Extras


- K8-SHELF03 - Shelf for KXCC2-PREP + KXCC3-PREP
- K8-GUIDE02 - Left hand guide for KXCC2/3-PREP
- K8-GUIDE03 - Right hand guide for KXCC2/3-PREP
- X1-CASTORKIT2 - Castor kit for KXCC2-PREP
- X1-CASTORKIT3 - Castor kit for KXCC3-PREP
- K8-GASKET04 - Door gasket



Technical Specification

| | KXCC2-PREP | KXCC3-PREP |
|-------------------|--------------|--------------|
| Temperature Range | +2°C ~ +8°C | +2°C ~ +8°C |
| Climate Class | 4 | 4 |
| Power Supply | 13amp | 13amp |
| Cooling | Fan assisted | Fan assisted |
| Defrost | Automatic | Automatic |
| Noise Level | 42db | 42db |
| Refrigerant | R600a | R600a |
| Power Usage (w) | 170 | 240 |
| Weight (kg) | 80 | 130 |

KXCC2-PREP

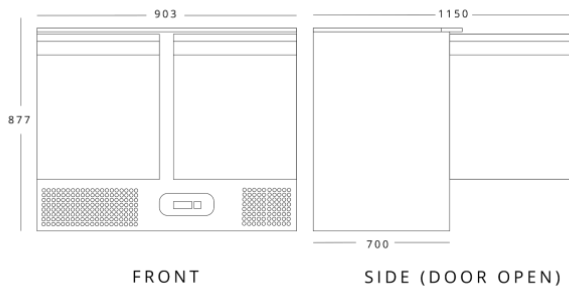

KXCC3-PREP

