



HBC2

Dimensions (mm)	External	Internal
Height	950	564
Width	1360	799
Depth	700	580
Capacity (ltr)		
Gross		282
Net		186



HBC3

Dimensions (mm)	External	Internal
Height	950	564
Width	1795	1234
Depth	700	580
Capacity (ltr)		
Gross		417
Net		311



HBC4

Dimensions (mm)	External	Internal
Height	950	564
Width	2230	1669
Depth	700	580
Capacity (ltr)		
Gross		553
Net		415



LBC2

Dimensions (mm)	External	Internal
Height	950	564
Width	1360	799
Depth	700	580
Capacity (ltr)		
Gross		282
Net		187



LBC3

Dimensions (mm)	External	Internal
Height	950	564
Width	1795	1234
Depth	700	580
Capacity (ltr)		
Gross		417
Net		311



LBC4


Dimensions (mm)	External	Internal
Height	950	564
Width	2230	1669
Depth	700	580
Capacity (ltr)		
Gross		553
Net		415

Features

- Stainless steel exterior & interior
- Even air distribution by ducted system
- Heavy duty castors as standard
- Coved 100mm upstand as standard
- Internal corners rounded for easy cleaning
- 1 x adjustable GN1/1 shelf per door
- Self closing doors with dwell position
- Replaceable door gasket

Additional Extras


- X1-SHELF04 - Shelf
- X1-GUIDE02 - Shelf guides (pair)
- X1-DRAWERPACK2 - Drawer pack for HBC2,3,4
- X1-DRAWERPACK3 - Drawer pack for HBC2,3,4
- B1-GASKET27 - Door gasket




Technical Specification

	HBC2	HBC3	HBC4	LBC2	LBC3	LBC4
Temperature Range	+2°C ~ +8°C	+2°C ~ +8°C	+2°C ~ +8°C	-18°C ~ -22°C	-18°C ~ -22°C	-18°C ~ -22°C
Climate Class	4	4	4	4	4	4
Power Supply	13amp	13amp	13amp	13amp	13amp	13amp
Cooling	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Defrost	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Noise Level	42db	42db	42db	42db	42db	42db
Refrigerant	R290	R290	R290	R290	R290	R290
Energy Efficiency Class	C	C	D	E	E	E
Energy Consumption (kw/24hrs)	2.253	3.184	4.771	7.81	9.196	10.826
Power Usage (w)	220	230	345	520	560	650
Weight (kg)	128	154	185	133	179	196


HBC2

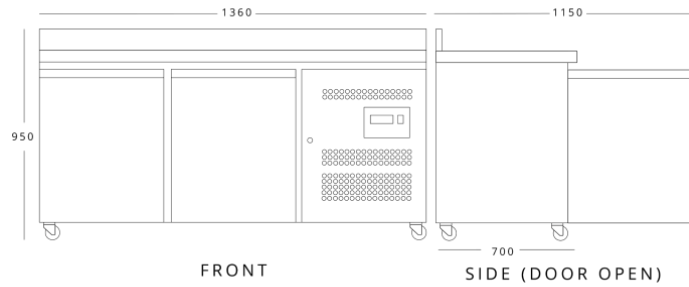


HBC3

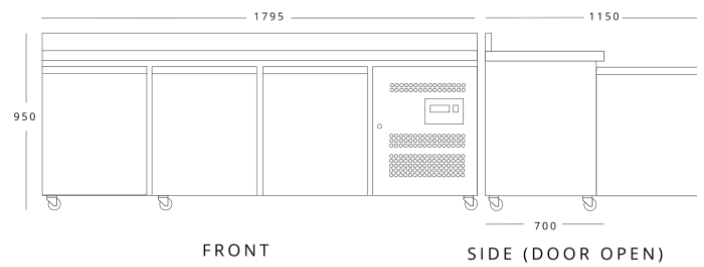


HBC4

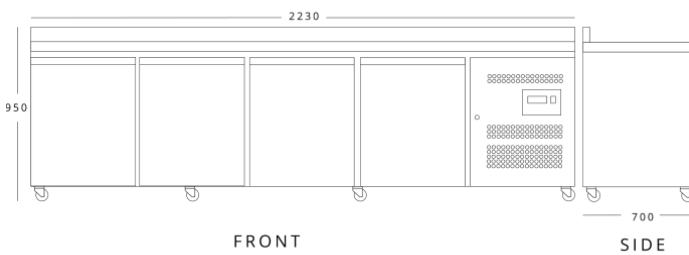

LBC2

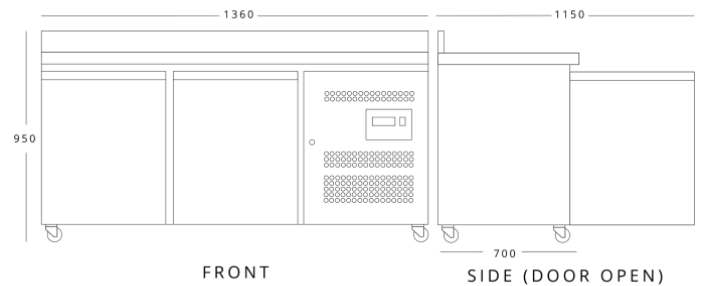

LBC3

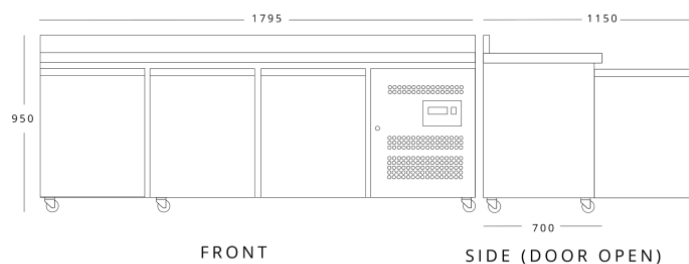

LBC4

