

Refrigerated Counters with Base Motor

Boletus Series

Boletus Series are Counters with Base Motor and consist of several models with the sole purpose of maximizing the worktop areas inside and outside the Professional Kitchen. **They are available in 5 different model types:** With Stainless Steel Worktop, Retractable Stainless Steel Lid, Two Different Types of Vitrine (Flexible & Squared) and Sneeze Guards (Single & Double) and the newest addition: Preparation Station Model!



Common Features

- | | | | |
|---|---|---|---|
| Energy Classification under EU directives (Only BPVP7300) | Evaporator protection against corrosion | 2 years Warranty on mechanical and electrical parts | 5 Available in 5 Different Model Types: |
| With natural refrigerant R290 (Zero ODP/GWP=3) | Forced air circulation technology | GN 1/1 Internal dimensions | 1) Stainless Steel Worktop |
| Embedded controller for easy operation and cleaning | Clip-On Guides for fast & easy cleaning | Automatic evaporation of condensate water | 2) Retractable Stainless Steel Lid |
| 1 shelf per door | Maximum GN pan depth allowed: 150mm (pans not included) | Injected polyurethane foam insulation | 3) Two Types of Vitrines (Flexible Vitrine System & Squared Type Vitrine) |
| Hygienically designed interior | Removable magnetic door gasket | Density 42 kg/m ³ , HFC Free (Zero ODP, Low GWP) | 4) Two Types of Sneeze Guards (Single & Double) |
| Material AISI 304 18/8-10 | Tempered Glass Vitrines | Automatic defrost | 5) Preparation Station |
| | | Self-closing door at 90° | Refrigeration Mechanism is placed at the base of the appliance for improved ergonomics in cases of limited space |

Characteristics

Refrigerated Counters with Base Motor



Model	BPVP7300	BSVP77	BSVP7300	BSQP7300	BPZP7300	BVV7300	BRV7300
TYPE	STAINLESS STEEL WORKTOP	RETRACTABLE S.S. LID	FLEXIBLE VITRINE SYSTEM	SQUARED TYPE VITRINE	PREPARATION STATION	SINGLE SNEEZE GUARD MODEL	DOUBLE SNEEZE GUARD MODEL
Capacity (lt)	245	245	245	245	245	245	245
Dimensions (mm)	1080×700×858	1080×700×900	1080×700×1298	1080×700×1302	1080×700×1004	1080×700×1298	1080×700×1298
Gross / Net (kg)	110 / 98	106 / 91	135 / 121	132 / 118	113 / 101	131 / 117	131 / 117
Packaged Volume (m³)	0,8	0,88	1,25	1,25	-	1,25	1,25
Shelves (pcs)	2	2	2	2	2	2	2
Operating Temperature (°C)	0 / +10	+3 / +10	+3 / +10	+3 / +10	0 / +10	+3 / +10	+3 / +10
Rated Voltage (V/Hz)	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50	230 / 50
Electrical Power (W)	344	344	370	370	360	370	370
Energy Class	C	-	-	-	-	-	-
Climate Class	5	4	4	4	4	4	4
Refrigerant	R290 	R290 	R290 	R290 	R290 	R290 	R290 

Special Features

- Material AISI 304 18/8-10
- New style Condenser with low maintenance requirements
- Energy Classification under EU directives (BPVP7300)
- Ambient Temperature +43°C (for BPVP7300 models)
- Ambient Temperature +32°C (all other Boletus models)
- Tempered Glass Vitrines
- Available in 5 Different Model Types:
 - 1) Stainless Steel Worktop (BPVP7300)
 - 2) Retractable Stainless Steel Lid (BSVP77)
 - 3) Two Types of Vitrines: Flexible Vitrine System (BSVP7300) & Squared Type Vitrine (BSQP7300)
 - 4) Two Types of Sneeze Guards (Single & Double)
 - 5) Preparation Station with GN 1/4 Pans with maximum depth 150 mm (BPZP7300)

Options

- Wifi  next page
- Choice of Colors (RAL Palette) next page
- without Refrigeration Mechanism but NOT Compact Dimensions next page
- with an Upstand (only for BPVP7300) next page
- with Worktop 80cm deep (excluding BSVP77) next page

Personalization

Refrigerated Counters with Base Motor

Options

Extras

		Model Extension	Dimensions	New Model Code
	Wifi	.../WI	-	Example: BPVP7300/ WI
	Color (RAL)	B: BLACK C: ALL OTHER	-	Example: BPVP B 7300 Example: BPVP C 7300
	With Worktop 80cm deep	.../80	-	BPVP7300/ 80
	With Upstand	.../A	6cm	Only for: BPVP7300/ A
		.../A1	10cm	Only for: BPVP7300/ A1
	Corner Upstand	.../ABL	6cm	BPVP7300/ ABL
	(Left Corner:/ABL)	.../ABL1	10cm	BPVP7300/ ABL1
	(Right Corner:/ABR)	.../ABR	6cm	BPVP7300/ ABR
		.../ABR1	10cm	BPVP7300/ ABR1
	Without Refrigeration Mechanism, but NOT Compact Dimensions	.../WM		BPVP7300/ WM BSVP77/ WM BSVP7300/ WM

Accessories

Shelves

Counters GN 1/1

	Model	Dimensions
	Shelf For Refrigerated Counter	SP9117 325×530
	Refr. Counter Shelf (Stainless Steel)	SP9117/I 325×530

Rails

		Model	Dimensions
	Rails	RAS108	1062×335×175

Guides

Counters GN 1/1


	Model	Dimensions
 Pair of Guides Counters	OS117	555×18×26
 Pair of Anti- Drop Guides Counters	OS117/AD	555×18×26

Polyethylene Display Plate

	For Model	Model	Dimensions
	BSV730	AE2110	970×260×20

Blueprints


Refrigerated Counters with Base Motor

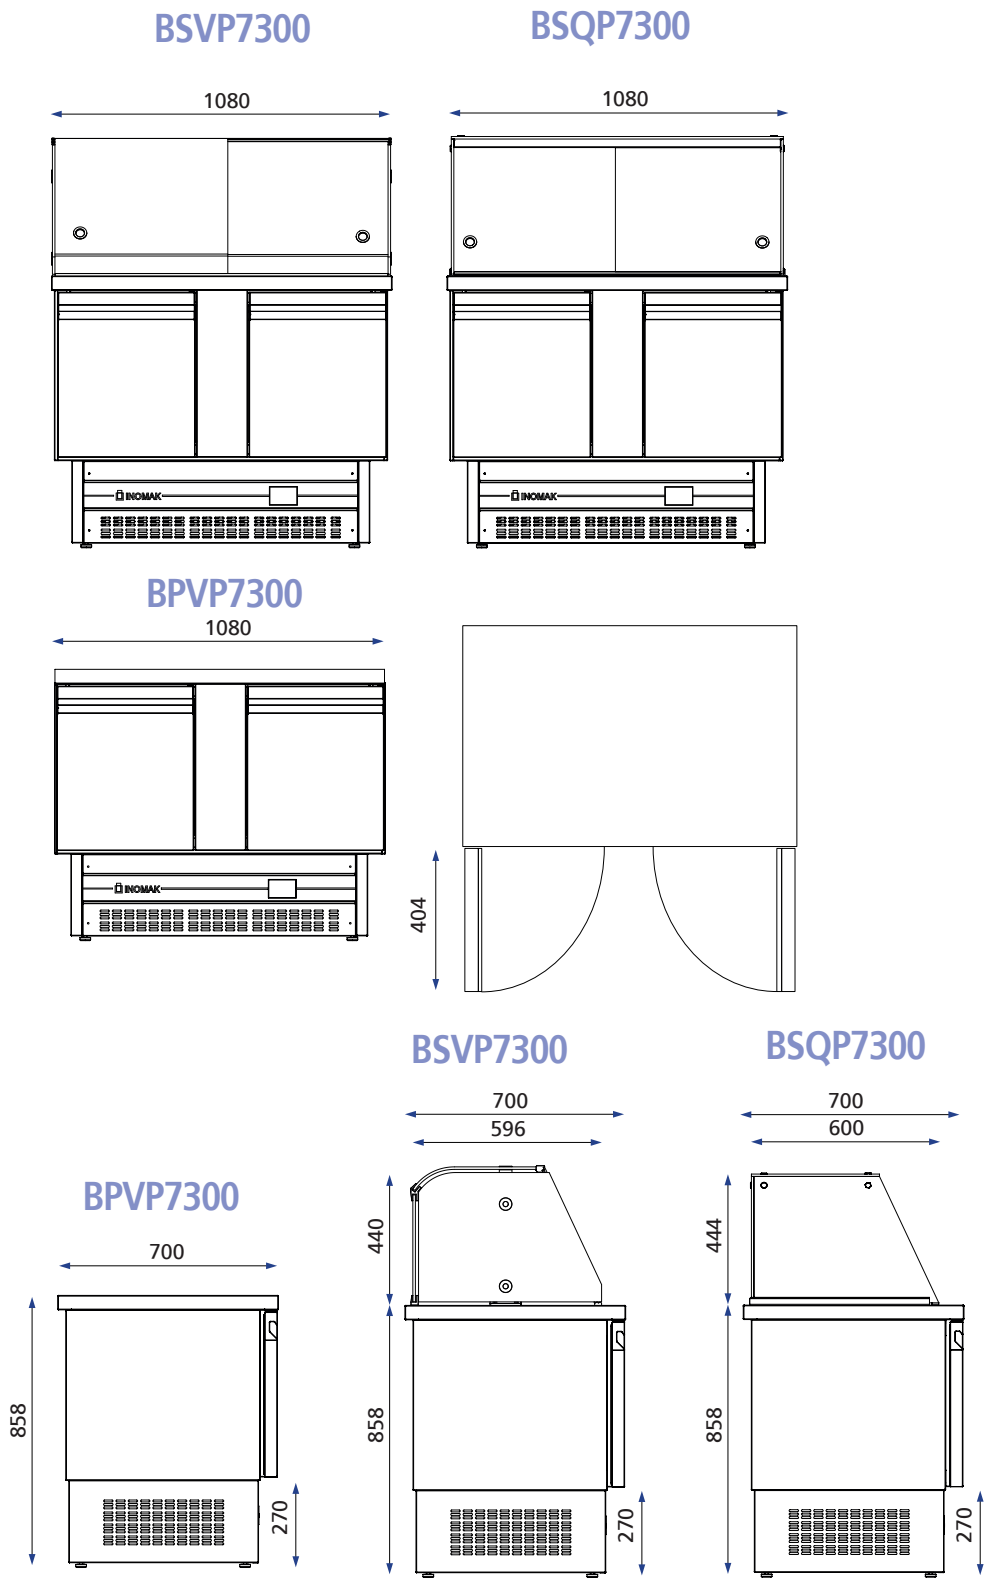

Blueprints

Refrigerated Counters with Base Motor

BSVP77

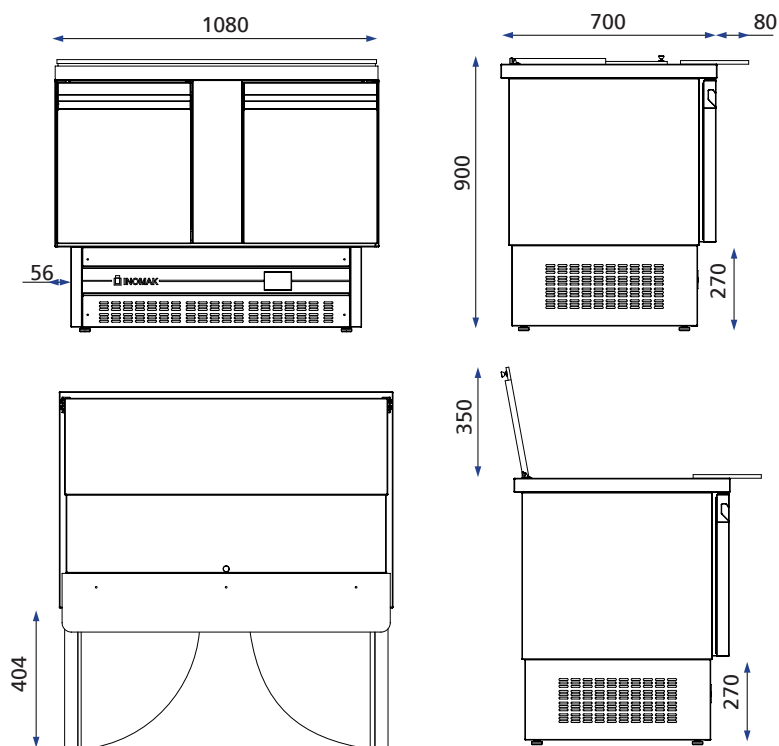

BPZP7300

